


INDUFLEX

Corrugated pipe - PA 6 - Standard - orange -

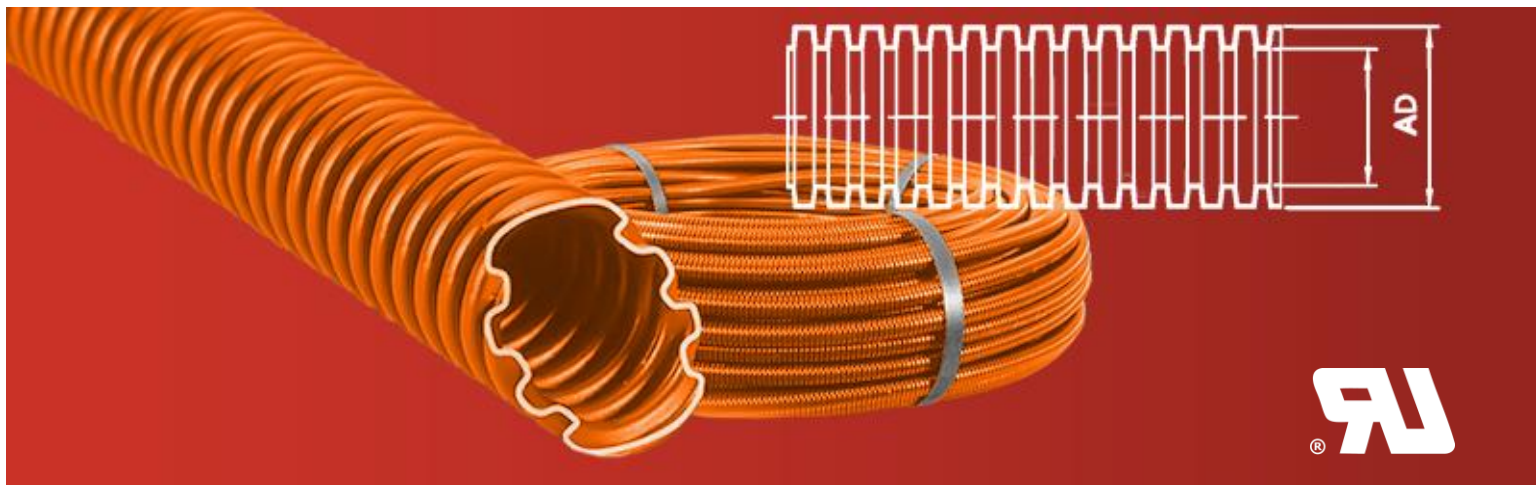

Application area

Hose to be applied in machine construction and in automotive industry and E-mobility

Material

PA 6, free of halogens

Chemical resistance

PA 6 is resistant against nearly every medium (alcohol, fat, mineral oil, motor fuel). Only concentrated and strong oxidising acids can affect PA 6.

Physical properties

Raw material:

Elastic modulus [MPa]	DIN ISO 527-1/-2	1400
Impact strength [kJ/m ²]	DIN ISO 179-1 (23°C)	NB
	(-30°C)	NB
Tensile strength [MPa]	DIN ISO 527-1/-2	>50
Elongation at break [%]	DIN ISO 527-1/-2	>100
Volume resistivity [Ω cm]	DIN IEC 60093	<10 ¹³
Surface resistivity [Ω]	DIN IEC 60093	<10 ¹³
Flammability	UL 94	HB

Tube:

Working temperature (permanent)	[°C]	-40 up to +120
Working temperature (short term)	[°C]	+150
Fire behaviour		FMVSS 302, DIN 75200
UL-Admission from NW 17 up to NW 50 *		UL File E 209725
(No UL-Admission for all slotted pipes)		

Art. No. (not slotted)	Art. No. (slotted)	Diameter NW [mm]	Outer Ø AD [mm]	Inner Ø ID [mm]	Bending radius [mm]	Packing unit [m]
TM0049001U8	TM1049001U8	4.5	7.3	4.3	≥ 8	100
TM07F9050U8	TM17F9050U8	7F	10.2	7.2	≥ 7	50
TM0079050U8	TM1079050U8	7.5	10.0	6.7	≥ 13	50
TM0859050U8	TM1859050U8	8.5	11.7	8.4	≥ 15	50
TM0109050U8	TM1109050U8	10	13.0	9.9	≥ 20	50
TM0129050U8	TM1129050U8	12	15.7	12.2	≥ 30	50
TM0139050U8	TM1139050U8	13	15.8	12.7	≥ 35	50
TM0149050U8	TM1149050U8	14	18.5	14.2	≥ 40	50
TM0179050U8	TM1179050U8	17	21.2	16.6	≥ 45	50
TM0199050U8	TM1199050U8	19	24.3	19.3	≥ 50	50
TM0229050U8	TM1229050U8	22	25.4	21.3	≥ 50	50
TM0239050U8	TM1239050U8	23	28.3	23.2	≥ 55	50
TM0269025U8	TM1269025U8	26	31.2	25.8	≥ 60	25
TM0299025U8	TM1299025U8	29	34.5	29.0	≥ 65	25
TM0379025U8	TM1379025U8	37	42.4	36.0	≥ 90	25
TM0509025U8	TM1509025U8	50	53.8	48.1	≥ 100	25

Subject to modifications and amendments! / February 2020